



— BROCK SOLID® —

GRAIN SPREADERS

Safeguarding Your Grain® Since 1957

BROCK® Grain Spreaders

Brock's Grain Spreader Distributes Grain For Optimum Drying/Aeration Uniformity




Totally-enclosed C-face motor is mounted directly to an in-line gear reducer for no loss of horsepower and no belts to maintain or replace.

Wear plate shown on the motor end protects the motor in grain flow.



Optional Centering Cone

Adjustable Hanging Brackets allow a wide range of hanging heights and fill hole diameters.

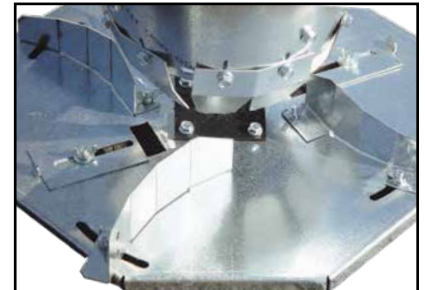

Spreader impellers can be adjusted to match the grain throw distance to the bin's diameter.

Galvanized steel construction for durability and low maintenance.

Optional Flow Guides

Optional Centering Cone and Flow Guides (shown on spreader at left) are used in systems with a flow rate of less than 2,000 bushels per hour.

Spreader Specifications

| Spreader Capacity (Bushels Per Hour)* | | |
|---------------------------------------|----------|--------------------------------|
| Model | Capacity | Bin Diameter |
| GS-3 | 3,000 | 24 to 48 Feet 7.3 to 14.6 m |
| GS-6 | 6,000 | 24 to 60 Feet 7.3 to 18.3 m |

| Spreader Model | HP | Phase | Voltage | Spreader Weight | |
|----------------|-------|-------|---------|-----------------|-------|
| GS-31 | 1/2 | 1 | 115 | 90 Lbs. | 41 kg |
| GS-33 | 1/2 | 3 | 230/460 | 90 Lbs. | 41 kg |
| GS-33-5 | 1/2 | 3 | 575 | 90 Lbs. | 41 kg |
| GS-61 | 1-1/2 | 1 | 115 | 100 Lbs. | 45 kg |
| GS-63 | 1-1/2 | 3 | 230/460 | 100 Lbs. | 45 kg |

*Spreader capacity will vary depending on moisture and type of grain.



— BROCK SOLID® —

Safeguarding Your Grain® Since 1957

BROCK GRAIN SYSTEMS

A Division of CTB, Inc.

A Berkshire Hathaway Company

Phone: +1 866.658.4191

www.brockgrain.com

Email: sales@brockgrain.com

BR-2052/202011