



SQ SERIES DRYERS

SUPERB

ENERGY MISER

SQ



**BROCK
SOLID**
DRYING &
CONDITIONING



FULL HEAT CONTINUOUS FLOW DRYERS

**FULL HEAT CONTINUOUS FLOW DRYERS
USING TWO TEMPERATURE ZONES**


SQ D Series
Full Heat – Single Zone



SQ M Series
Modified Full Heat – Single Zone or Two-Zone
Pressure Heat / Pressure Cool



SQ E Series
Modified Full Heat – Single Zone or Two-Zone
Pressure Heat / Pressure Cool
Pressure Heat / Vacuum Cool

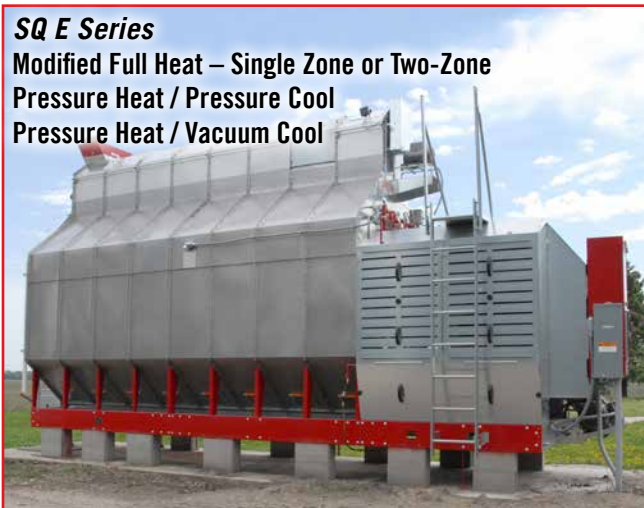

SQ A Series
Modified Full Heat – Single Zone or Two-Zone
Pressure Heat / Pressure Cool
Pressure Heat / Vacuum Cool
Hot Air Return Ducts



CONTINUOUS FLOW DRYERS WITH LOUVERS

**CONTINUOUS FLOW DRYERS WITH LOUVERS
AND HOT AIR RETURN DUCTS**


EVENFLO® UNLOADING SYSTEM

Unique EVENFLO® Unloading System Is Part of Brock's Difference by Design

- Gentle handling of the grain using the EVENFLO® System's efficient, slow-moving drag-style conveyor.
- Patented conveyor unloading system replaces auger and metering rolls.
- Even unloading of grain columns with improved ability to pass most debris.
- More durable and safer to operate than auger systems.



Take-up adjustments are located at both ends of the conveyor. This feature helps you to easily adjust the chain if needed.

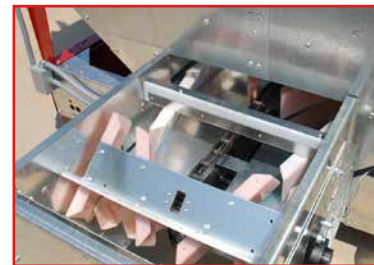


How Does the Brock EVENFLO® Dryer Unloading System Work?



- The top portion of the chain conveyor passes by the column of dried grain, continuously removing grain from the column.
- Grain is then carried to square holes allowing the grain to fall through to the bottom trough.
- Paddles on the conveyor move the dried grain to the dryer discharge.

The EVENFLO® System's uniform unloading of grain dryer columns provides consistent drying results. Slow, straight-line movement of grain is also ideal for sensor accuracy in monitoring exit moisture content.

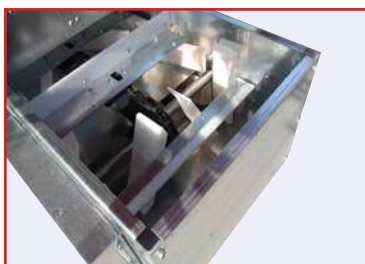

Clean up between crops or at the end of the drying season is easy:

- The top cover of the conveyor assembly can be removed for safer, easier cleaning.
- No meter rolls to clean.

Low horsepower, variable-speed AC motor is used to economically power the EVENFLO System.



SUPERB**ENERGY MISER®**

FEATURES FOR MEETING YOUR ON-FARM GRAIN DRYING NEEDS



Stainless Steel Outer Skins

Stainless steel outer 18-gauge perforated skins are standard on all SUPERB ENERGY MISER® SQ Series Dryers for a lifetime of satisfaction. With proper care and maintenance, stainless steel perforated skins offer long life and high asset retention value.



Efficient Full Flame-Wall Burner

Brock's full flame-wall burner with stainless steel baffles provides a generous square footage of flame surface and distributes heat evenly to all the grain columns. Using a shorter flame, this fuel-efficient Brock burner burns cleanly and provides uniform plenum temperatures to help maintain top grain quality.



Unobstructed Heat Movement

The SQ Series Dryer's unique built-in vaporizer is located out of the burner's airflow to ensure uniform heat distribution.

Moisture Equalizers

Patented Brock MOISTURE EQUALIZER® System maintains grain quality by moving the hottest and driest grain through the dryer faster for greater drying uniformity and less over-drying.



Vertical Access Plenum Door

A 42- x 22-inch (107- x 56-cm) vertical access door is provided for easy access to the dryer's plenum areas. A door safety switch is standard on all SUPERB ENERGY MISER Low-Profile Dryers. If the door is opened during operation, the dryer will shut down.



Perforated Wet Garner Bin

The drying process starts in the perforated wet garner bin. Heated air is routed from the dryer through this temporary grain holding area to pre-heat and begin drying the wet grain.



Variable Width Grain Column

A narrower upper grain column allows moisture-saturated drying air to escape. This variable width design dries more effectively than a larger holding capacity with a wider grain column.



Super Quiet Drying

The SQ Series Dryers use a super quiet double-width, double-inlet centrifugal blower as standard equipment. This blower provides maximum airflow and efficiency while minimizing sound levels.



Easy Access for Service

Access entrances at both the top and bottom of the dryer make it easy to service industrial-grade plumbing, burner, fan, motor, bearings, belts, linear limits, and the front of the unloading system.



Upper Service Access Area



Lower Service Access Area

Cool Air Control

Adjustable cooling louvers help control grain temperature by regulating the amount of cool air used for vacuum-cooling mode.





DRYER SPECIFICATIONS

MODEL	SQ8	SQ12	SQ16	SQ20	SQ24	SQ28	SQ32	SQ36	SQ40
Total Fan HP	10	10	15	20	25	30	40	50	50
Auger Load HP	2	3	3	5	5	7.5	7.5	10	10
Chain Unload HP	2	2	2	2	2	2	2	3	3
Column Length	8' 2"	12' 3"	16' 4"	20' 5"	24' 6"	28' 7"	32' 8"	36' 9"	40' 10"
Overall Length	19'	23' 1"	27' 2"	31' 3"	36' 4"	40' 5"	44' 6"	48' 7"	52' 8"
Overall Height	14' 2"	14' 2"	14' 2"	14' 2"	14' 2"	14' 2"	14' 2"	14' 2"	14' 2"
Bushels Held	163	245	326	408	490	572	654	734	815
SQ-A/E DRYERS									
Overall Width (SQ-A Dryers)	NA	NA	10' 2"	10' 2"	10' 2"	10' 2"	10' 2"	10' 2"	10' 2"
Overall Width (SQ-E Dryers)	NA	NA	7' 9"	7' 9"	7' 9"	7' 9"	7' 9"	7' 9"	7' 9"
Burner Rating* (SQ-A, E Dryers)	NA	NA	4.3	6.6	7.5	7.9	9.5	12.6	13.4
SQ-D/M DRYERS									
Overall Width (SQ-D, M Dryers)	7' 4"	7' 4"	7' 4"	7' 4"	7' 4"	7' 4"	7' 4"	7' 4"	7' 4"
Burner Rating* (SQ-D, M Dryers)	4.4	4.8	6.3	8.5	10.9	11.9	14.4	15.9	16.5

SUPERB ENERGY MISER® SQ Series Dryers use the following model descriptions:

A – Continuous flow dryer with louvers and hot air return duct and capable of full heat, pressure heat/pressure cool drying or pressure heat/vacuum cool drying.

E – Continuous flow dryer with louvers and capable of full heat drying, pressure heat/pressure cool drying or pressure heat/vacuum cool drying.

D – Continuous flow dryer capable of full heat drying.

M – Continuous flow dryer using two temperature zones and capable of either full heat or pressure heat/pressure cool drying.


*Maximum burner capacity in million BTUs/hour

DRYING CAPACITY – WET BUSHEL PER HOUR

DRYER MODELS	SQ8	SQ12	SQ16	SQ20	SQ24	SQ28	SQ32	SQ36	SQ40
Full Heat - Single Zone (Model D)									
Corn 25.5% to 15.5%	248	351	466	591	740	830	969	1066	1153
Full Heat - Single Zone (Model D)									
Corn 20.5% to 15.5%	405	579	770	976	1211	1371	1601	1761	1905
Modified Full Heat - Single Zone (Models M,E,A) (doors in divider floor)									
Corn 25.5% to 15.5%	N/A	N/A	447	567	710	796	930	1023	1107
Modified Full Heat - Single Zone (Models M,E,A) (doors in divider floor)									
Corn 20.5% to 15.5%	N/A	N/A	740	937	1163	1316	1537	1691	1830
Pressure Heat - Two-Zone (Model M)									
Corn 25.5% to 15.5%	N/A	N/A	422	535	670	751	877	965	1044
Pressure Heat - Two-Zone (Model M)									
Corn 20.5% to 15.5%	N/A	N/A	687	871	1091	1223	1428	1571	1700
Pressure Heat & Cool - Two-Zone (Models M,E,A)									
Corn 25.5% to 15.5%	N/A	N/A	261	332	416	467	542	600	647
Pressure Heat & Cool - Two-Zone (Models M,E,A)									
Corn 20.5% to 15.5%	N/A	N/A	401	508	637	714	833	916	991
Pressure Heat & Vacuum Cool - Two-Zone (Models E,A)									
Corn 25.5% to 15.5%	N/A	N/A	294	366	454	519	595	673	740
Pressure Heat & Vacuum Cool - Two-Zone (Models E,A)									
Corn 20.5% to 15.5%	N/A	N/A	435	541	654	758	879	983	1077
Pressure Heat & Vacuum Cool - Two-Zone w/ Hot Air Return Ducts (Model A)									
Corn 25.5% to 15.5%	N/A	N/A	288	358	419	499	580	657	724
Pressure Heat & Vacuum Cool - Two-Zone w/ Hot Air Return Ducts (Model A)									
Corn 20.5% to 15.5%	N/A	N/A	435	541	654	758	879	983	1077

TRUEGRAIN™ MOISTURE SENSOR SYSTEM WITH PARALLEL SENSING TECHNOLOGY™


Whatever moisture level you set your grain dryer to hit, is what you get. With Brock's exclusive patent pending TRUEGRAIN™ System, grain passes through a parallel sensing field in a fixed vertical chamber that isolates outside factors. This advancement allows your Brock dryer to output more accurate grain moisture levels and more consistent profitability.

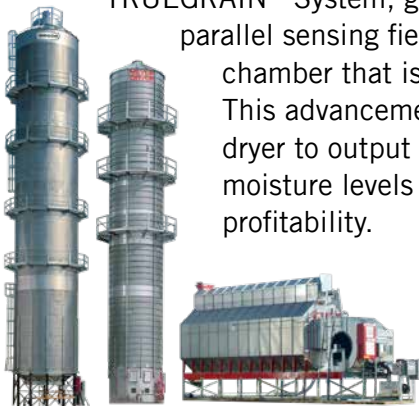

See this one-of-a-kind technology at brockgrain.com/TrueGrain



ADVANCED ELECTRONIC GRAIN DRYING CONTROL

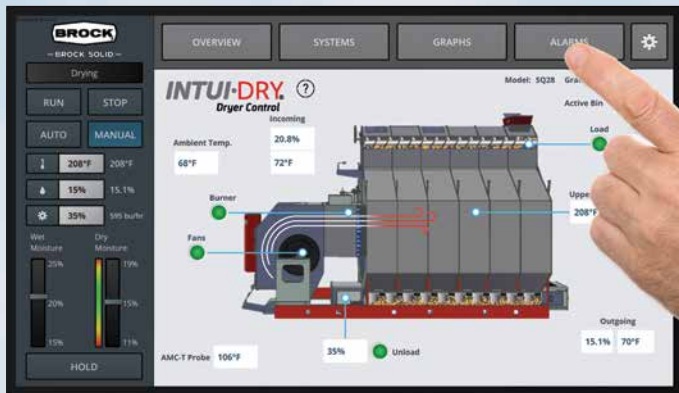

INTUI-DRY® Dryer Control

is innovative. It's intuitive. It's mission control made simple. The INTUI-DRY® Controller's proven drying algorithms and straight-forward controls take grain drying to the next level.

Built From The Ground Up

From the solid-state components to the all-new software system, Brock took a clean-slate approach to build one of the most reliable and intuitive dryer management systems. INTUI-DRY Control also has quick connectors and fewer components for easy maintenance.

Easy Connections


It connects to your dryer with standard Ethernet cable. If your grain system already has PLC controls, the INTUI-DRY Control can communicate with the PLC using industry-standard protocols.

Remote Control

Web-based monitoring of the INTUI-DRY Controller gives you enhanced remote access through your smartphone, tablet or laptop computer — so you can monitor and control your dryer system anytime, nearly anywhere.



The **SYSTEMS** screen provides detailed access and control of main dryer systems.


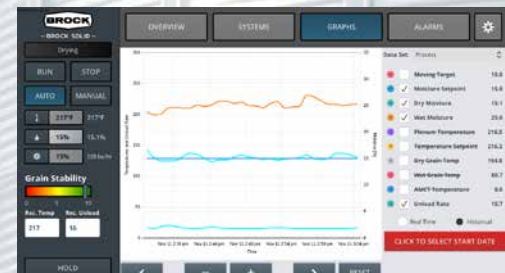


The **GRAPHS** screen clearly outlines both wet and dry moisture percentages, so you can track trends throughout the day or further back in time.



The **ALARMS** screen lets you quickly see alarm events with codes and accurate timestamps.

BROCK'S SOLUTIONS FOR ON-FARM GRAIN STORAGE, HANDLING, DRYING, CONDITIONING & STRUCTURES

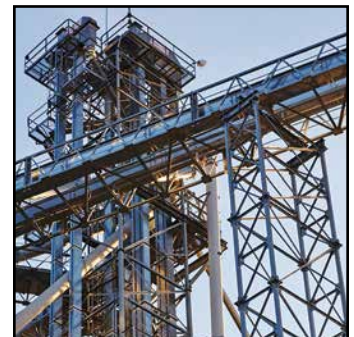

—BROCK SOLID—

BROCK GRAIN SYSTEMS

A Division of CTB, Inc.
A Berkshire Hathaway Company
Phone: +1 866.658.4191
Internet: www.brockgrain.com
Email: sales@brockgrain.com

BR-2073/202301